



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

MOBILE BARS & BACK-UP SERVICE

For Conventional Beverage Service Using Cans and Bottles

WEATHER-ALL "SCB SERIES"

Increase beverage sales with a portable bar - built to serve as the toughest bar in town!

- 1** Constructed entirely of stainless steel, these attractive and functional bars are tough enough to be used outside year-round, and beautiful enough to grace the most elegant banquet hall
- 2** Perfect for event hosting in any environment with conventional bar service - use of cans and bottles without dispensing system
- 3** Made for mobile applications - FWE 5', 6', 8' Weather-All series bars are constructed with a stainless steel tubular welded base frame, and designed to absorb vibration and shock during transport
- 4** Conventional ice sink with drain. 60lb ice bin capacity with sliding stainless steel cover
- 5** NSF Approved - The sanitary stainless steel work areas and interior make clean up quick and easy
- 6** Removable bottle speed rail
- 7** Matching back bar and ice carts are available

***Two year limited warranty**



SCB-6
(Shown with Full Perimeter Bumper Optional Accessory and Locking Storage Area Doors Optional Accessory)

SIC-200
(Shown with Full Perimeter Bumper Optional Accessory)



Perfect For Event Hosting



Stainless Steel Construction



Ice Sink



Removable Speed Rail



PROJECT:


MODEL:

QUANTITY:

ITEM NO:

SPECIFICATIONS:

WEATHER-ALL "SCB SERIES" BARS available with matching Back-Up Bar and Ice Cart

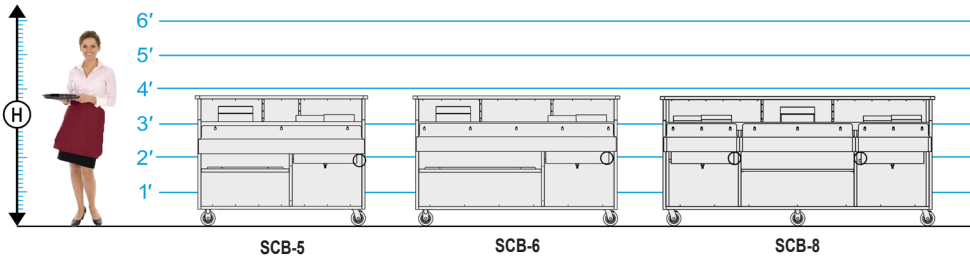

SCB-5

SCB-6


SCB-8

BACK BAR SPSC-6

(Shown with Full Perimeter Bumper optional Accessory)



- Enclosed on three sides!
- Stores glasses and bar accessories
- Convenient work/serve top
- Stainless steel interior shelves on 9.5", 11.5", and 14" spacings
- Welded stainless steel frame
- 5" casters

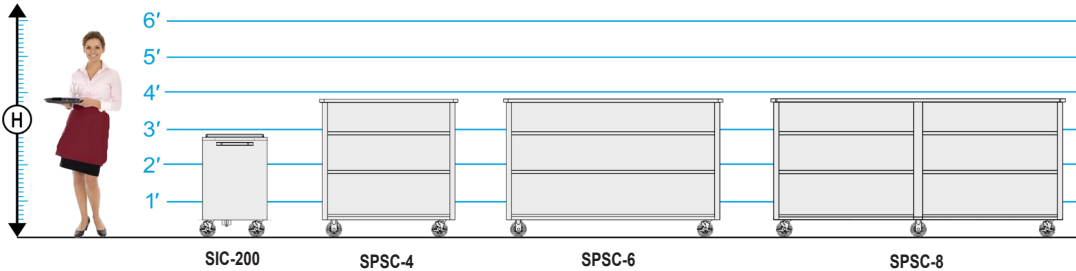

SIC-200

SPSC-4

SPSC-6

SPSC-8

ICE STORAGE CART SIC-200

(Shown with Full Perimeter Bumper optional Accessory)



- Holds 200 lbs of ice!
- Fully insulated storage
- Sliding stainless lid, drain, push bar handle
- Welded stainless steel frame
- All swivel 5" casters

MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm)			Consult Factory for SHIPPING CLASS			SHIP WT. LBS. (KG)
	HIGH "H"	DEEP "D" [A]	LONG "L"	WORKING AREA HEIGHT	STORAGE AREA DIMS (IN)	CASTER SIZE	
SCB-5	45.25" (1150)	30.25" (769)	60" (1524)	35.5" (902)	30.5W x 28H x 23D	5"	250 (114)
SCB-6	45.25" (1150)	29.5" (750)	72" (1829)	35.5" (902)	42.5W x 28.5H x 23D	5"	490 (223)
SCB-8 [B]	45.25" (1150)	29.5" (750)	96.5" (2452)	35.5" (902)	39.25W x 28H x 23D	5"	660 (300)

[A] With standard speed rail removed the width dimension is 24.75".

[B] SCB-8 model furnished with 2 sinks.

MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm)			ICE TANK CAPACITY	CASTER SIZE	SHIP WT. LBS. (KG)
	HIGH "H"	DEEP "D"	LONG "L"			
SIC-200	34.75" (883)	23.75" (604)	22.25" (565)	200 lbs	5"	130 (59)

MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm)			CASTER SIZE	SHIP WT. LBS. (KG)
	HIGH "H"	DEEP "D"	LONG "L"		
SPSC-4	45.25" (1149)	26" (661)	45.5" (1156)	5"	290 (132)
SPSC-6	45.25" (1149)	26" (661)	72" (1829)	5"	290 (132)
SPSC-8	45.25" (1149)	26" (661)	96.5" (2452)	5"	290 (132)

CONSTRUCTION. Heliarc welded, single unit construction shall consist of welded stainless steel base frame of heavy gauge 1" square stainless steel tubing with extra 10 gauge stainless steel caster corner plate reinforcements.

BODY / TOP MATERIALS. Shall be stainless steel, heliarc welded; ground and polished Full length, heavy gauge stainless steel angles reinforce front corners of body on inside, with high impact edging on outside corners. Work surface shall be constructed of 20 gauge stainless steel. Interior of body shall be lined with 22 gauge stainless steel, bonded to cabinet walls and bottom storage area. Seams shall overlap for greater durability and moisture resistance. Work and splash areas shall be polished stainless steel with easy-to-clean coved corners. Front edge shall have raised marine nosing to retard spills.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Eight (8) foot models are equipped with six (6) casters: two (2) rigid casters and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

STORAGE AREA. On all models, the bottom storage area shall be stainless steel lined. Provided with one shelf.

ICE CHEST. Insulated ice chest shall be one piece stainless steel with coved corners: 19.75" x 12.75" x 10.5" deep with shut off drain valve. 60lbs ice storage capacity. Ice chest includes two piece stainless steel sliding lid.

BAR ACCESSORIES. Standard equipment shall include 4.25" deep, heavy gauge stainless steel full length bottle speed rail; removable without tools. Towel ring shall be mounted to working side. Stainless steel condiment holder.

Optional Accessories:

- Locking bottle speed rail
- Locking doors for storage areas
- Stainless steel bar gutters
- Protective storage cover
- Powder coated S/S top
- Built-in electric hand sink
- Corner bumpers
- Full perimeter bumper

FWE products may be covered under one or more of the following U.S. patents: 286,299;238,300;3,952,609;4,192,991.

All rights reserved.
All specifications subject to change without notice.
Errors subject to correction.
© 16 Food Warming Equipment Company, Inc.
R.18.01



FOOD WARMING EQUIPMENT COMPANY, INC.
5599 HWY. 31 W. Portland, TN 37148
815.459.7500 | Fax: 815.459.7989 | sales@fwe.com

800-222-4393
www.FWE.com



COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS