

UTILITY CARTS, ENCLOSED**All Stainless Steel, Enclosed on Three Sides****"UCE" SERIES**

Utility carts enclosed on three sides for secure storage, serving, and durability during transport

- 1** Transport, serve, and store with FWE's heavy-duty UCE series enclosed Queen Mary utility carts - enclosed on three sides to protect less stable items such as dishes during transport or storage
- 2** All-welded construction with extra welds at critical points means lasting durability. The 16 gauge stainless steel shelves can easily transport your heaviest loads
- 3** Each stainless steel shelf has 6.5 to 9.5 square feet of working space. Models available with 3 to 6 shelf configurations
- 4** Easily transport over thresholds and various terrains - Large 8" EZ Roll polyurethane casters and heavy-duty base frame improve impact resistance, durability, and stability
- 5** Tubular push handles provide comfortable control
- 6** Full perimeter, non-marking bumper protects the unit and walls from dents and scratches
- 7** Quick and easy customization - custom sizing and shelf spacing are available to fit your unique operation

***Two year limited warranty**

MODEL NOMENCLATURE

Utility Cart, Enclosed Space Between Shelves, In.
UCE - **3** **15** - **62** Full Unit Width, In.
 Number of Shelves



Heavy-Duty Welded
Stainless Steel Construction



Tubular Welded Base Frame



Large EZ Roll Casters





Custom Sizing and
Spacing Available

STAINLESS STEEL

SPECIFICATIONS

UTILITY CARTS, ENCLOSED

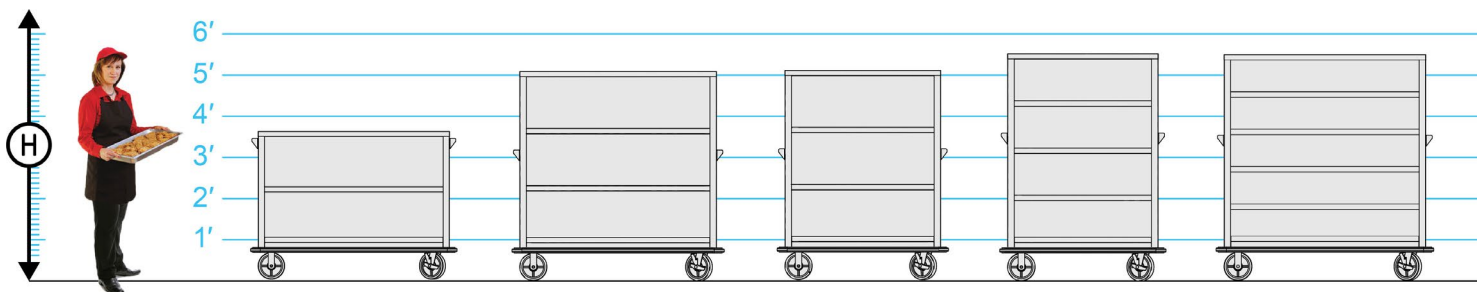

MODEL NUMBER	NUMBER OF SHELVES [A]	SHELF CLEARANCE (mm)	SHELF SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CASTER SIZE	SHIP WT. LBS. (KG)
				HIGH "H"	DEEP "D"	WIDE "W"		
	3	15" (381)	53.5" x 23.75" (1358 x 603)	44.5" (1131)	28" (712)	62" (1575)	8"	325 (148)
	4	15" (381)	53.5" x 23.75" (1358 x 603)	61" (1550)	28" (712)	62" (1575)	8"	360 (164)
	4	15" (381)	41.5" x 23.75" (1054 x 603)	61" (1550)	28" (712)	50" (1270)	8"	270 (123)
	5	12" (304)	39.75" x 23.75" (1010 x 603)	65.5" (1664)	28" (712)	48" (1220)	8"	320 (146)
	6	9" (228)	53.5" x 23.75" (1358 x 603)	64.25" (1632)	28" (712)	62" (1575)	8"	450 (205)

Consult Factory for SHIPPING CLASS

[A] Number of shelves includes top surface.

CONSTRUCTION. Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners. Three-sided enclosed 20 gauge stainless steel exterior.

BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking vinyl cushion. Shall be continuous, with corner cut-outs to facilitate cleaning.

CASTERS. 8" maintenance-free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge castor plate. The castor mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded-in-place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

PUSH BAR HANDLE. Heavy-duty 1" diameter tubular stainless steel push handles.

SHELVES. Shelf made of heavy-duty 16 gauge stainless steel.

SHELVES

Custom shelf size & spacing
Reinforced shelves

CASTERS

Upgraded casters
6 caster configuration

DOORS

Locking doors

EXTRAS

Top corner bumpers