



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

ALUMINUM ENCLOSED TRANSPORT CABINETS

Utility Transport for 18" x 26" Trays

"ETC-1826 ALUMINUM SERIES"

ALUMINUM

- Non-Heated (Ambient)
- Non-Insulated
- Fits 18" x 26" Trays



ETC-1826-15-40



ETC-1826-15-24

Economical and functional aluminum transport for bussing and storage.



These sturdy aluminum cabinets provide an economical solution for your transport and storage needs. "ETC" Aluminum tray cabinets are fully enclosed for added durability to transport 18" x 26" trays. Full swing door design allows for fast and easy tray access.

Aluminum cabinet construction with fixed tray rack allows for sanitary maintenance.

Casters are mounted to reinforcement plates for added durability to take the demands of foodservice.

They're heavy-duty, yet light weight to maneuver, even when fully loaded.



- ◇ Heavy-duty aluminum
- ◇ All welded construction - no rivets
- ◇ Welded base frame
- ◇ Heavy-duty polyurethane casters
- ◇ 270° door swing
- ◇ Gravity door latch
- ◇ Menu card clip
- ◇ Fixed tray rack with 1.5" spacings
- ◇ NSF approved



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: ENCLOSED TRANSPORT CABINET

NO HEAT
NON-INSULATED

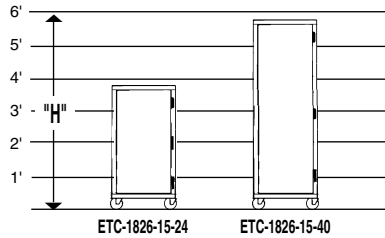

DOOR SWING: 20"

MODEL NUMBER	CAPACITIES 1.5" FIXED SPACING TRAY CAPACITY	OVERALL EXTERIOR DIMENSIONS IN. (mm)			NO. OF DOORS	CASTER SIZE	Consult Factory for SHIPPING CLASS	
		HIGH "H"	DEEP "D"	WIDE "W"			SHIP WT. LBS. (KG)	CUBIC FEET (m ³)
Non-Insulated Utility Transport Cabinets - Aluminum								
ETC-1826-15-24	24 - 18" x 26" trays / pans	38" (965)	28" (711)	21" (533)	1	5"	120 (54)	15.69 (.44)
ETC-1826-15-40	40 - 18" x 26" trays / pans	68" (1727)	28" (711)	21" (533)	1	5"	145 (66)	24.24 (.69)

CONSTRUCTION. Heavy duty extruded type 6063 aluminum alloy. All uprights and runners are fully welded. Tongue and groove sidewall panels are continuously welded for maximum strength. Top and base are formed with four (4) lips down and welded.

DOOR AND LATCH. Door shall be constructed of .125" thick aluminum panel and shall have three (3) double knuckle stainless steel hinges mounted by bolts. Hinges provide a 270° door swing. Door shall be held closed with a gravity latch. Latch design also works as menu card clip.

TRAY GUIDES. Tray guides are .625" deep x .090 thick at 1.5" spacings, welded to the uprights.
CASTERS. 5 inch heavy-duty, easy rolling, polyurethane tire casters with 1.5" wheel, full swivel.

Optional Accessories:

- Larger casters
- Casters with brakes
- Full perimeter bumper
- Corner bumpers (set of 4)
- Solid base
- Tray guard



Food Warming Equipment Company, Inc.

P. O. Box 1001
Crystal Lake, IL 60039 USA
800-222-4393; 815-459-7500
Fax: 815-459-7989

Manufacturing Facilities:
7900 S. Route 31
Crystal Lake, IL 60014 USA
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.
All specifications subject to change without notice.
© 07 C Food Warming Equipment Company, Inc.