



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

HAND SINK

Self Contained Portable Hand Sink

"HS" SERIES

Portable hand sink is self-contained to allow hand washing and sanitizing in remote serving locations.

- 1** FWE's portable hand sinks are perfect for hosting an event in any location, making it possible to offer practical hand washing for sanitary food preparation whenever it is needed
- 2** Made for transport applications - FWE hand sinks are fully constructed of stainless steel and equipped with heavy duty maintenance free casters
- 3** Marine top edge prevents spills and drips while on the move
- 4** Provided with 5 gallon fresh water tank for consistent draw and a 7 gallon soiled water tank to hold runoff and drainage
- 5** Water heater with adjustable thermostat quickly warms water for dispensing when needed
- 6** Lockable door prevents unauthorized access for safety and security
- 7** 8" deck mount nozzle and quarter turn handles make it easy to turn water on and off
- 8** Additional standard features include: built in backsplash, soap dispenser and removable paper towel dispenser, mounted per customer specification

***Two year limited warranty**



HS-24



All Stainless Steel Construction



Water Tanks



Lockable Door



8" Deck Mount Nozzle

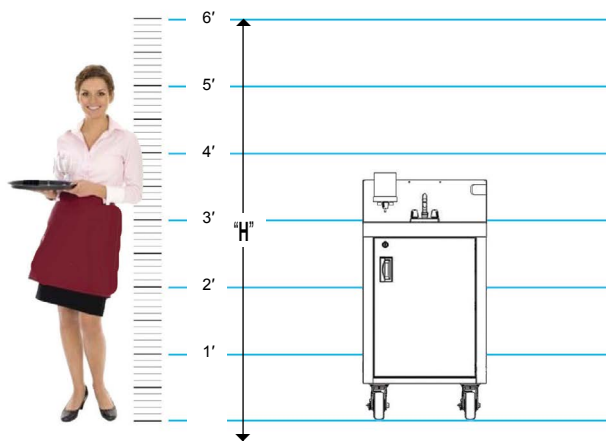


made to serve you better





PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: SELF CONTAINED PORTABLE HAND SINK



HS-24

ELECTRICAL DATA	
VOLTS	120
WATTS	1625
AMPS	13.5
HERTZ	60
PHASE	Single
PLUG USA	 5-15P
PLUG CANADA	 5-20P

MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			SHIPPING CLASS 150		
	HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
HS-24	44" (1118)	23" (584)	24" (610)	1	5"	200 (91)

CONSTRUCTION. Helarc welded, single unit construction of 18 gauge stainless steel with easy-to-clean covered corners.

DOORS AND LATCHES. Flush mounted, stainless steel door. Magnetic recessed pull handle with locking cam latch. Heavy duty pin style hinges

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake.

WATER CAPACITY. The unit shall include one (1) five gallon fresh water tank and one (1) seven gallon waste water tank. 120 volt, 1500 watt electric water heater heats up to 2.7 gallons of water. Glass insulated tank for thermal efficiency and fast recovery.

ELECTRICAL CHARACTERISTICS. 3 wire grounded 10 foot extension power cord and plug. Standard with rear cord exit, option left side exit provided. See electrical data chart above for amperage and receptacle configuration.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

Optional Accessories

- DOORS**
- Left hand door hinging
- CASTERS**
- All swivel or larger casters
- EXTRAS**
- Full extension bumper
- Cord winding bracket
- Corner bumpers
- Extra fresh water tank
- Extra waste water tank

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
© 17 Food Warming Equipment Company, Inc. R.17.01



FOOD WARMING EQUIPMENT COMPANY, INC.
5599 HWY. 31 W. Portland, TN 37148
815.459.7500 | Fax: 815.459.7989 | sales@fwe.com

800-222-4393
www.FWE.com

