



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

HEATED HOLDING TRANSPORT CABINETS

For Baskets

TOP MOUNT "UHST-B" SERIES

High capacity heated holding cabinet to compliment your speed-line operation

- 1 FWE's Universal "Wire Speed Basket" cabinet was specifically designed to provide needed capacity and holding performance to operations using wire speed baskets
- 2 Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport. Rear tubular handle is standard for added maneuverability
- 3 From retherm to speed-line operations, these units address the common requirement for additional flexibility and back-up holding of finished products in 13" x 26" or 18" x 26" wire baskets, as well as flexibility to accommodate 18" x 26" and sheet trays
- 4 UHST-B series features FWE's Top Mount heat system, which eliminates hot and cold spots by gently circulating hot air throughout the interior of the cabinet
- 5 Simple to Use Electronic Control, User Friendly, Easy to Read & Easy to Set. Temperature Set Range of 90°F to 190°F (32°C to 88°C). Provided with a Low Temperature Alarm
- 6 Top mount heat system, elements and blower are protected from spillage and leaves the bottom of the cabinet open for easy cleaning reducing maintenance and cleaning costs



REETHERMS AVAILABLE FOR A COMPLETE SYSTEM

Improve your operation today! See Specification page 07-02, RH-RB series, for high volume basket rethermalization ovens from FWE.

***Two year limited warranty**



UHST-14-B



UHST-22-B



UHST-28-B
(Shown with Dutch Door and Wire Baskets Optional Accessories)



Rear Tubular Handle for Transport



18" x 26" Baskets



Control Panel




Open Bottom Base



CE IP X4



SPECIFICATIONS: HEATED HOLDING TRANSPORT CABINETS

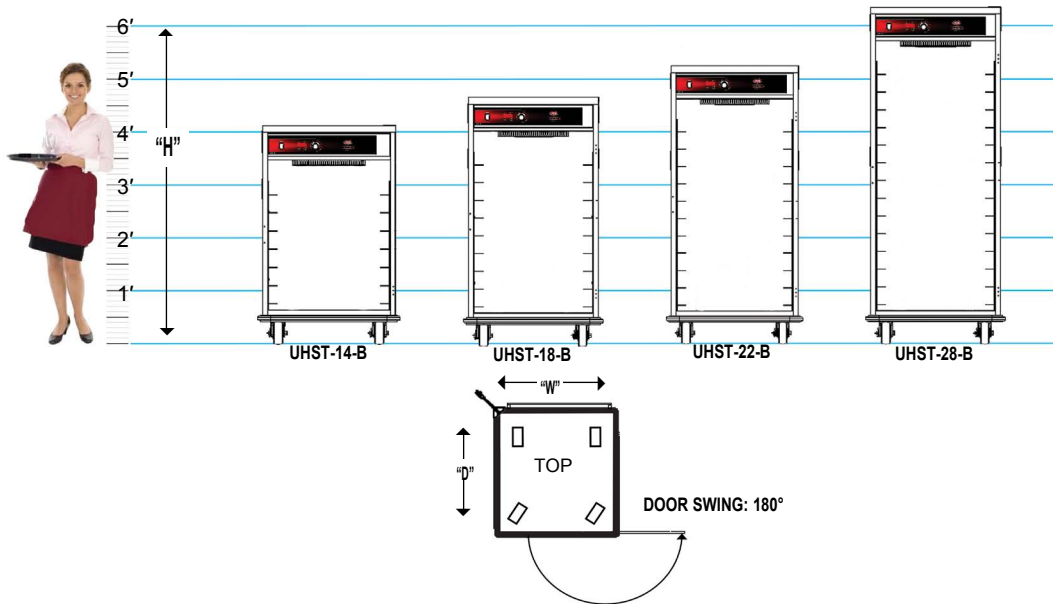

CAPACITIES AT 4" (102MM) FIXED SPACINGS ^[A]					OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height includes Casters)			CLASS 100		
MODEL NUMBER	WIRE BASKETS		TRAYS		HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
	13" x 26"	18" x 26"	18" x 26"	18" x 26"						
UHST-14-B	14	7	7	7	48.25" (1226)	36.75" (933)	33.5" (851)	1	5"	280 (127)
UHST-18-B	18	9	9	9	56.25" (1429)	36.75" (933)	33.5" (851)	1	5"	315 (142)
UHST-22-B	22	11	11	11	64.25" (1632)	36.75" (933)	33.5" (851)	1	5"	345 (156)
UHST-28-B	28	14	14	14	76.25" (1937)	36.75" (933)	33.5" (851)	1	5"	410 (158)

ELECTRICAL DATA - SINGLE PHASE			
VOLTS	120	208	220-240
WATTS	1692	1551	2001
AMPS	14.1	7.5	8.3
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA			
PLUG CANADA			

*Dedicated circuit.

[A] Fixed Slides accommodate (2) baskets 13" x 26" or (1) basket 18" x 26", or (1) 18" X 26" sheet tray per slide.
UHST-B models are available with See-thru Lexan Door [add "L"] and Dutch Doors [add "D"] optional accessories. Note: Dutch Doors are 2 half size doors only available on full-size models.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20-gauge polished exterior, 22-gauge stainless steel interior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing plates at corners.
INSULATION. Insulated throughout; top, back, bottom, sides, doors using high density ceramic and fiberglass insulation.
HANDLES. Flush-in-wall hand grips recess mounted on each side of unit and heavy-duty, 1" diameter tubular stainless steel push handle mounted at rear of unit.
BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

DOORS AND LATCHES. Flush mounted, field reversible, stainless steel insulated door. High temperature gasket sealed; gasket shall be cabinet mounted. Full-size doors shall have two (2) heavy-duty edgework mounted die cast hinges. Magnetic door latch shall be edgework mounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.
CASTERS. Polyurethane tire casters with Zerk grease (lubrication) fittings in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge stainless steel reinforcing stress plate. The casters shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

HEATING SYSTEM / CONTROLS. Top mounted, forced air blower system shall include Hi-Temp, self-lubricated, impedance protected, fan-cooled blower motor to distribute heat equally throughout cabinet interior with distribution tunnels shall be vented for balanced air circulation. Electronic controls shall include an easy to read digital display of cabinet temperature (with recall capacity of temperature set point and actual cabinet temperature), equipped with a programmable low temperature alarm, master ON/OFF switch with power indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C).
ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present
BASKET AND SHEET TRAY SLIDES. Stainless steel racks shall be one piece die stamped channel-type slides at 4" (101.6mm) spacings to accommodate: 13.5"x26" or 18"x26" wire speed baskets as well as 18"x26" sheet trays. Racks are removable without tools for cleaning.

Optional Accessories

- ELECTRIC**
- Manual controls
- 220 volt, 50/60 Hz, single phase
- Ungraded element
- DOORS**
- Key locking door latch
- See-thru Lexan door
- Dutch doors
- Paddle latch
- Padlocking transport latch
- CASTERS**
- All swivel or larger casters
- Floorlock (requires 6" casters)
- EXTRAS**
- Security packages
- Cord winder bracket
- X-factor frame
- Passive water pan
- Tubular s/s handles
- Baskets

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
© 16 Food Warming Equipment Company, Inc. R.16.04



FOOD WARMING EQUIPMENT COMPANY, INC.
5599 HWY. 31 W. Portland, TN 37148
800.222.4393 | 815.459.7500 | Fax: 815.459.7989
www.FWE.com | sales@fwe.com

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS

