



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

PRISONER TRAY SERVER

For 13" x 14" Compartment Insulated Trays

CORRECTIONAL "ETC SERIES"

HEAVY DUTY

NO HEAT

NON-INSULATED

TRANSPORT AND SERVE



ETC-1314-64
(Trays not included)

"Correctional Quality" – Heavy-duty stainless steel transport serves insulated trays efficiently, securely, and at less cost!



TM

Rugged prisoner tray transport in heavy-duty stainless steel - Easy to maintain and non-electrical!

FWE's heavy-duty prisoner tray transport are fully enclosed and designed for fast tray access. Built for mobility, FWE's unibody construction keeps the cabinet balanced and stable during transport. Doors lay flat against unit for out-of-the-way food service.

Serve hot and or cold foods using pellet systems, insulated, or disposable containers. Meals can be loaded ahead of time, then transported to serving location. Our internal frame construction is designed to endure the most rigorous operations and environments, eliminating cabinet torquing during transport, assuring FWE cabinets last longer than any other – period!


Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. Casters are mounted to reinforcement plates for added durability and take the impact over thresholds. Built tough from stainless steel for continuous demanding use, FWE is the "Choice of Professionals".

- ◇ "Maxi-Guard" locking security latch for each door
- ◇ Tamper resistant fasteners throughout
- ◇ Multi-Terrain casters
- ◇ Heavy-duty 12-gauge stainless steel hinges
- ◇ Flush-in door, positive close paddle latch
- ◇ All stainless steel
- ◇ All welded construction - no rivets (extra welds at critical points)
- ◇ Tubular stainless steel welded base frame
- ◇ Heavy-duty tubular push bar handles
- ◇ Doors lie flush when open
- ◇ Insulated doors
- ◇ Pitched center drain
- ◇ Full extension bumper
- ◇ Fully insulated door
- ◇ One year parts, six months labor limited warranty

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: PRISONER TRAY SERVER

**Compartment
Trays**

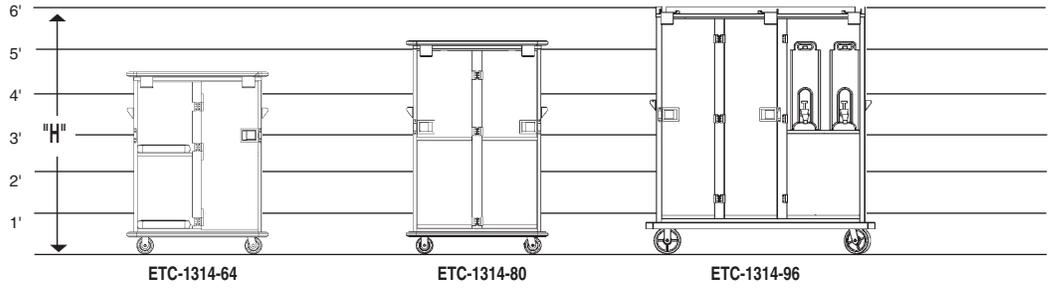

MODEL NUMBER	INSULATED TRAY CAPACITIES 13" x 14" Compartment Insulated Trays (2.5" High)	OVERALL EXTERIOR DIMENSIONS IN. (mm)			NO. OF SHELVES	NO. OF DOORS	CASTER SIZE	Consult Factory for SHIPPING CLASS	
		HIGH "H"	DEEP "D"	WIDE "W"				SHIP WT. LBS. (KG)	CUBIC FEET (m ³)
ETC-1314-64	64 Insulated Trays	54" (1372)	34.5" (876)	42" (1067)	2	2	5"	290 (130)	45.28 (1.28)
ETC-1314-80	80 Insulated Trays	63" (1600)	34.5" (876)	42" (1067)	2	2	5"	330 (148)	52.82 (1.49)
ETC-1314-96	96 Insulated Trays	74" (1880)	36.5" (927)	68.5" (1740)	1	3	6"	360 (162)	104 (2.94)

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 18-gauge polished exterior. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners.

PUSH BARS. Heavy-duty, 1" diameter tubular stainless steel push handles. Mountings welded in place and reinforced with stainless steel channel to prevent removal.

BUMPER. Solid 1-1/2" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning. Bottom and top bumper are standard features.

DOORS AND LATCHES. Flush mounted, stainless steel, insulated doors. When opened, doors lie flush against side of unit or another door to keep work aisles unobstructed. Door shall have three (3) heavy-duty, 12-gauge stainless steel hinges. Door shall be equipped with a positive closing, flush-in-door, stainless steel paddle latch. The hinge and latch mountings are reinforced with stainless steel backing plates. Door shall be provided with padlock compatible (padlock not included) transport/security latch.

CASTERS. Multi-terrain casters in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

PITCHED DRAIN. Cabinet shall have a pitched center drain to facilitate thorough cleaning of interior.

SHELVES. Heavy-duty stainless steel shelf. Shelf is welded in place to prevent removal.

ABUSE RESISTANT FEATURES. Cabinet shall have tamper-resistant fasteners in all critical areas, and extra welds throughout for added durability. Heavy-duty 1" diameter tubular stainless steel push handles shall be welded in place and reinforced with stainless steel channel to prevent removal. Door shall be provided with padlock compatible (padlock not included) transport/security latch.

- Optional Accessories:**
- All swivel or larger casters
 - Carriage bolts

FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.



Food Warming Equipment Company, Inc.
P.O. Box 1001
Crystal Lake, IL 60039 USA
800-222-4393; 815-459-7500
Fax: 815-459-7989

Manufacturing Facilities:
7900 S. Route 31
Crystal Lake, IL 60014 USA
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.
All specifications subject to change without notice.
© 11C Food Warming Equipment Company, Inc.