



|          |        |           |          |
|----------|--------|-----------|----------|
| PROJECT: | MODEL: | QUANTITY: | ITEM NO: |
|          |        |           |          |

# ENCLOSED UTILITY CARTS

**All Stainless Steel, Enclosed on 3-Sides**

**“UCE SERIES”**



UCE-315



UCE-415

**“Super-duty” stainless steel construction enclosed on 3 sides for secure and stable transport.**

Transport, serve, store or bus with FWE’s super heavy-duty UCE Series enclosed Queen Mary utility carts. These carts are enclosed on 3-sides, ideal for protecting less stable items such as dishes during transport or storage. These rugged mobile back-up units are built incredibly tough - tough enough to safely take loads of up to 1600 lbs. Each reinforced stainless steel shelf has over 9.5 square feet of working space - enough to carry three large serving trays. Models are available with 3 or 4 (24" x 57") shelves.

FWE’s utility carts are designed to last longer than any other - *period!* Welded construction and our exclusive tubular stainless steel base frame ensure that our cabinets will endure the most rigorous operations and environments. Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. 8" heavy-duty casters are mounted to reinforcement plates for added durability and take the impact over threshold. Locking doors or gates are available to secure from theft - making the “UCE” a perfect security transport/storage unit! So when you need a utility cart that performs year after year, day-in and day-out, make your choice FWE. . . the “Choice of the Professionals”.

- ◇ Enclosed on 3 sides
- ◇ 16-gauge stainless steel reinforced shelves
- ◇ 10-gauge corner reinforcements
- ◇ All stainless steel
- ◇ All welded construction - no rivets (extra welds at critical points)
- ◇ Tubular stainless steel welded base frame
- ◇ Full extension bumper
- ◇ Super-duty 8" polyurethane casters
- ◇ Two year limited warranty



TM



PROJECT:



MODEL:

QUANTITY:

ITEM NO:

# SPECIFICATIONS:

## ENCLOSED UTILITY CARTS

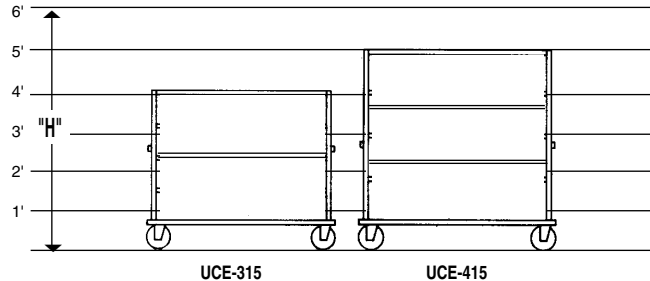

| MODEL NUMBER | NUMBER OF SHELVES | SHELF SPACING (mm) | SHELF SIZE (mm)           | OVERALL EXTERIOR DIMENSIONS IN. (mm) |              |               | CASTER SIZE | Consult Factory for SHIPPING CLASS |                              |
|--------------|-------------------|--------------------|---------------------------|--------------------------------------|--------------|---------------|-------------|------------------------------------|------------------------------|
|              |                   |                    |                           | HIGH "H"                             | DEEP "D"     | WIDE "W"      |             | SHIP WT. LBS. (KG)                 | CUBIC FEET (m <sup>3</sup> ) |
| UCE-315      | 3                 | 15"<br>(381)       | 24" x 57"<br>(635 x 1448) | 49.5"<br>(1257)                      | 27"<br>(686) | 62"<br>(1575) | 8"          | 250<br>(113)                       | 47.95<br>(1.36)              |
| UCE-415      | 4                 | 15"<br>(381)       | 24" x 50"<br>(635 x 1270) | 62"<br>(1575)                        | 27"<br>(686) | 55"<br>(1397) | 8"          | 285<br>(130)                       | 53.28<br>(1.51)              |

**CONSTRUCTION.** Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners. Uprights shall be 10-gauge stainless steel.

**BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond handles for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

**CASTERS.** 8" Super-duty (extra-wide) polyurethane tire casters with Zerk grease (lubrication) fittings in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**PUSH BARS.** Two (2) heavy-duty, 1" diameter tubular stainless steel push handles welded in place.

**SHELVES.** Shelves shall be heavy-duty 16-gauge polished stainless steel, die-formed. Underside of each shelf shall be reinforced with extra heavy-gauge stainless steel, welded to 10-gauge stainless steel corner angles. Each shelf shall be capable of carrying up to 200 lbs. of distributed load.

### Optional Accessories:

- All swivel or larger/smaller casters
- Enclosed on 3 sides
- Oversized models
- Custom shelf spacing

*FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.*



### Food Warming Equipment Company, Inc.

P.O. Box 1001  
Crystal Lake, IL 60039 USA  
800-222-4393; 815-459-7500  
Fax: 815-459-7989

Manufacturing Facilities:  
7900 S. Route 31  
Crystal Lake, IL 60014 USA  
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.

All specifications subject to change without notice.  
© 10 Food Warming Equipment Company, Inc.