

# INSULATED ENCLOSED TRANSPORT CABINETS

Insulated Utility Transport for Universal Trays, Pans, and Gastro-Norm

## INSULATED AMBIENT "ETC-UA-INS" SERIES

*All purpose insulated cabinet for storage and transport*




ETC-UA-13INS

**INSULATED**

- 1** High density fiber glass insulation throughout retains food quality and temperatures without the use of an external heat source
- 2** Unique design holds 12" x 20" pans, 18" x 26" sheet trays, or GN containers on fully adjustable tray slides. Slides are removable for thorough interior cleaning
- 3** Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 4** Full perimeter bumper extends beyond doors, handles, etc., preventing damage to facility or cabinet
- 5** Heavy-duty polyurethane casters are long lasting and used for easy maneuverability, even when fully loaded
- 6** Push pull handles provide greater user control and transporting ease
- 7** Keep your food chilled with the popular cold plate cartridge optional accessory
- 8** Heavy-duty die cast hinges support fully insulated door equipped with edge mounted, full grip latch for easy use

*\*Two year limited warranty*



Adjustable Tray Slides



Tubular Welded Base Frame



Built for Transport



Push Pull Handles





FOR MODEL-SPECIFIC CERTIFICATIONS SEE [FWE.COM/CERTIFICATIONS](http://FWE.COM/CERTIFICATIONS)

**NON-HEATED**

# SPECIFICATIONS

# ENCLOSED TRANSPORT CABINETS

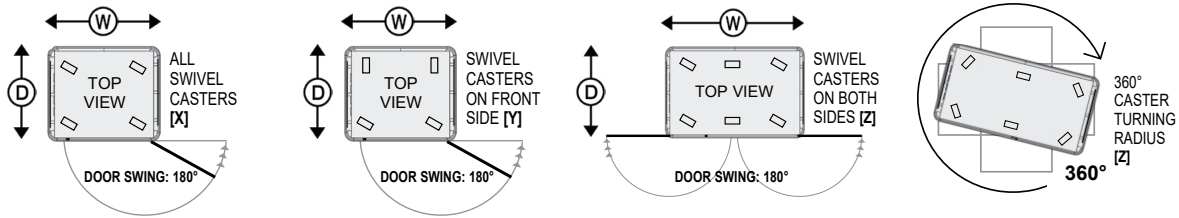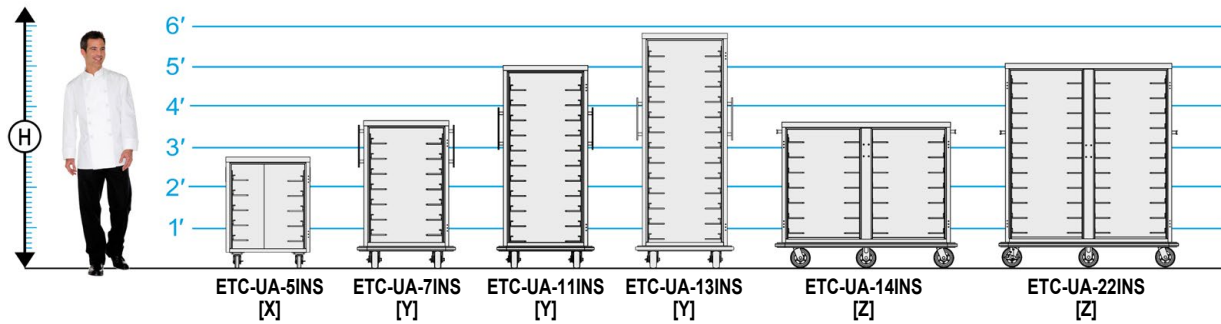

| MODEL NUMBER                           | CAPACITIES OF TRAYS / PANS: 4.5" (114 mm) Spacings are Standard [A] |         |         |         |         |         |         |                                                            |        |                     |                                       |               |         |         | CLASS 100                                                         |         |         |                 |             |                    |        |        |                     |              |               |          |                 |           |
|----------------------------------------|---------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|------------------------------------------------------------|--------|---------------------|---------------------------------------|---------------|---------|---------|-------------------------------------------------------------------|---------|---------|-----------------|-------------|--------------------|--------|--------|---------------------|--------------|---------------|----------|-----------------|-----------|
|                                        | STANDARD CAPACITY: NO. OF TRAYS/PANS @ 4.5" Spacings (114 mm)       |         |         |         |         |         |         | OPTIONAL CAPACITY: NO. OF TRAYS/PANS @ 3" Spacings (76 mm) |        |                     |                                       |               |         |         | OVERALL EXTERIOR DIMENSIONS IN. (mm)<br>(Height Includes Casters) |         |         | NUMBER OF DOORS | CASTER SIZE | SHIP WT. LBS. (KG) |        |        |                     |              |               |          |                 |           |
|                                        | TRAY/PAN SLIDES PROVIDED                                            | 18 x 26 | 12 x 20 | 14 x 18 | 18 x 13 | 20 x 22 | 10 x 20 | GN 2/1                                                     | GN 1/1 | MAXI-PAN 20x20 Rack | TRAY/PAN SLIDES PROVIDED (Additional) | 18 x 26       | 12 x 20 | 14 x 18 | 18 x 13                                                           | 20 x 22 | 10 x 20 |                 |             |                    | GN 2/1 | GN 1/1 | MAXI-PAN 20x20 Rack | HIGH "H"     | DEEP "D"      | WIDE "W" |                 |           |
| <b>34</b> ETC-UA-5INS<br>Under Counter | 5 pr                                                                | 5       | 10      | 10      | 10      | 5       | 10      | 5                                                          | 10     | 5                   | 5                                     | 7 pr (2 pr)   | 7       | 14      | 14                                                                | 14      | 7       | 14              | 7           | 14                 | 7      | 7      | 33.25" (845)        | 31.25" (794) | 25.5" (648)   | 1        | 3.5" ALL SWIVEL | 260 (118) |
| ETC-UA-7INS                            | 7 pr                                                                | 7       | 14      | 14      | 14      | 7       | 14      | 7                                                          | 14     | 7                   | 7                                     | 10 pr (3 pr)  | 10      | 20      | 20                                                                | 20      | 10      | 20              | 10          | 20                 | 10     | 10     | 43.75" (1112)       | 34" (864)    | 29.25" (743)  | 1        | 5"              | 275 (125) |
| ETC-UA-11INS                           | 11 pr                                                               | 11      | 22      | 22      | 22      | 11      | 22      | 11                                                         | 22     | 11                  | 11                                    | 16 pr (5 pr)  | 16      | 32      | 32                                                                | 32      | 16      | 32              | 16          | 32                 | 16     | 16     | 60.5" (1537)        | 34" (864)    | 29.25" (743)  | 1        | 5"              | 300 (136) |
| ETC-UA-13INS                           | 13 pr                                                               | 13      | 26      | 26      | 26      | 13      | 26      | 13                                                         | 26     | 13                  | 13                                    | 19 pr (6 pr)  | 19      | 38      | 38                                                                | 38      | 19      | 38              | 19          | 38                 | 19     | 19     | 69.5" (1765)        | 34" (864)    | 29.25" (743)  | 1        | 5"              | 315 (143) |
| ETC-UA-14INS                           | 14 pr                                                               | 14      | 28      | 28      | 28      | 14      | 28      | 14                                                         | 28     | 14                  | 14                                    | 20 pr (6 pr)  | 20      | 40      | 40                                                                | 40      | 20      | 40              | 20          | 40                 | 20     | 20     | 43.5" (1105)        | 33.5" (851)  | 54.25" (1378) | 2        | 6"              | 430 (195) |
| ETC-UA-22INS                           | 22 pr                                                               | 22      | 44      | 44      | 44      | 22      | 44      | 22                                                         | 44     | 22                  | 22                                    | 32 pr (10 pr) | 32      | 64      | 64                                                                | 64      | 32      | 64              | 32          | 64                 | 32     | 32     | 61.5" (1563)        | 33.5" (851)  | 54.25" (1378) | 2        | 6"              | 480 (218) |

[A] Universal tray slides accommodate: (1) 18" x 26", (2) 12" x 20", (2) 14" x 18", (2) 18" x 13", (1) 20" x 22", (2) 10" x 20" trays/pans. Uprights punched on 1.5" (38 mm) centers. Universal tray slides are adjustable. Number of tray slides are listed above. Standard spacings are 4.5" (114 mm).

ETC-UA-INS models are available with:  
**Pass-thru Door** [add "P"]  
**See-thru Lexan Door** [add "L"]  
**Dutch Doors** [add "D"]  
**Note:** Dutch Doors are 2 half size doors only available on full-size models.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.

**INSULATION.** "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides, and door(s).

**HANDLES.** Heavy-duty push bar handles, solid formed 1" x .375" thick; mounted at each end of unit. Mountings reinforced with stainless steel channel. ETC-UA-5INS model shall have recessed handles.

**BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame with snap-in, non-marking vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning. ETC-UA-5INS is standard without a bumper.

**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. ETC-UA-14INS and ETC-UA-22INS shall have a caster configuration of two (2) rigid, four (4) swivel with brake. ETC-UA-5INS model shall have a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted

to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**DOORS AND LATCHES.** Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgемounted die cast hinges. Door latch shall be edgemounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.

**TRAY SLIDES.** Welded rod-style tray slides are nickel plated for greater durability and sanitation. Fully adjustable / removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be punched on 1.5" centers for easy tray adjustment, and shall easily lift off of heavy-duty stainless steel brackets without the use of tools for cleaning.

**INSTALLATION.** Unit should not be installed in an area where adverse environmental conditions are present.

### OPTIONAL ACCESSORIES

- DOORS**
- Dutch doors
  - Key locking door latch
  - Magnetic latch
  - Paddle latch
  - Padlocking transport latch
  - Left hand door hinging (single door models only)
- CASTERS**
- All swivel or larger casters
  - Floorlock (requires 6" casters)
- SPACINGS**
- Extra tray slides
  - "Ultra-universal" slides
  - Fixed rack assembly
  - Shelves
- EXTRAS**
- Security packages
  - Tubular stainless steel push handles
  - Top corner bumper
  - Cold plate cartridge
  - Menu card holder
  - Dry erase board