MERCHANDISING STATION SPEED LINE

For Grab & Go Items in Various Bins and Serving Containers

STAINLESS STEEL & LAMINATE "ETC-MC" SERIES

Portable and versatile, this merchandising station enhances your speed line system with a sleek design to suit your space

- Our speed line equipment is mobile, modular, and flexible. Use these pieces individually or combine with matching speed line system for a complete look. Easily interchange individual units without replacing the entire system
- 2 Fits beautifully into your space with sleek, removable, laminate side panels. Choose from 13 laminate styles and find the perfect fit
- 3 Equipped with 3.5" all swivel locking casters easily rearrange your speedline layout in minutes, or move aside for cleaning
- 4 Stands up to daily wear with durable stainless steel workspace and tough laminate sides with stainless steel corner trim. Easy to clean stainless steel top and interior are resistant to corrosion
- Customizable to suit your needs, we offer a variety of custom sizes and options such as a sneeze guard, overshelf, and tray slide shelf
- 6 Various heights available to fit operation standard height (34") and elementary height (31.5")

*Two year limited warranty






Matching Speed Lines Available



Removable Side Panels




Mobile Applications



Standard or Elementary Height Available

SPECIFICATIONS

MERCHANDISING STATION SPEED LINE

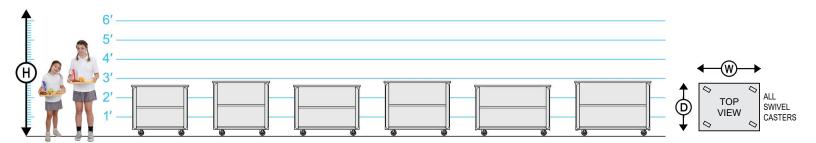

ELEMENTARY HEIGHT 31.5"

ELEMENTARY REIGHT 31.5										
	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)				CONSULT FACTORY FOR SHIPPING CLASS					
MODEL NUMBER	HIGH "H"	DEEP "D"	WIDE "W"	SHELF DIMENSIONS	SHELF CLEARANCE	CASTER SIZE (All Swivel)				
	31.5" (801)	32" (813)	36" (915)	28.25D" 33.75W"	12.25"	3.5"				
	31.5" (801)	35" (889)	36" (915)	31.25D" 33.75W"	12.25"	3.5"				
	31.5" (801)	32" (813)	42" (1067)	28.25D" 39.75W"	12.25"	3.5"				
	31.5" (801)	35" (889)	42" (1067)	31.25D" 39.75W"	12.25"	3.5"				
	31.5" (801)	32" (813)	48" (1220)	28.25D" 45.75W"	12.25"	3.5"				
	31.5" (801)	35" (889)	48" (1220)	31.25D" 45.75W"	12.25"	3.5"				

STANDARD HEIGHT 34"

STANDARD REIGHT 34									
	DIMEN	ALL EXT SIONS II ncludes			CONSULT FACTORY FOR SHIPPING CLASS				
MODEL NUMBER	HIGH "H"	DEEP "D"	WIDE "W"	SHELF DIMENSIONS	SHELF CLEARANCE	CASTER SIZE (All Swivel)			
	34" (864)	32" (813)	36" (915)	28.25D" 33.75W"	13.5"	3.5"			
	34" (864)	35" (889)	36" (915)	31.25D" 33.75W"	13.5"	3.5"			
	34" (864)	32" (813)	42" (1067)	28.25D" 39.75W"	13.5"	3.5"			
	34" (864)	35" (889)	42" (1067)	31.25D" 39.75W"	13.5"	3.5"			
	34" (864)	32" (813)	48" (1220)	28.25D" 45.75W"	13.5"	3.5"			
	34" (864)	35" (889)	48" (1220)	31.25D" 45.75W"	13.5"	3.5"			



CONSTRUCTION. Heliarc welded, single unit construction shall consist of welded stainless steel base frame of heavy gauge 1" square stainless steel tubing with extra 10 gauge stainless steel caster corner plate reinforcements. Work surface shall be constructed of 18 gauge stainless steel.

LAMINATE EXTERIOR. Side and rear laminate panels with stainless steel corner trim shall be .25" thick and easily removable with two screws. A variety of laminate selections are available.

CASTERS. Maintenance free polyurethane tire casters in a configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a $10\,$ gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular base frame.

STORAGE AREA. On all models, the bottom open storage area shall be stainless steel and include a stainless steel middle shelf.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

EXTRAS Connecting bracket 12" drop down tray slide Graphic vinyl decals Overshelf Sneeze guard Drop down side shelves Custom laminate (consult factory) Doors

CASTERS

Larger casters

FOOD WARMING EQUIPMENT COMPANY, INC. COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS



800-222-4393 WWW.FWE.COM SALES@FWE.COM