

HEATED BANQUET TRANSPORT & SERVE CABINETS


Pre-Plated Meals for Up to 11" Plates

TEMP SET RANGE: 90° - 190°F (32° - 88°C) 


HUMI-TEMP "P" SERIES



Humidified banquet cabinets are built to handle your most challenging events, on site or off premises, and keep your meals hot and fresh in up to (200) 11" plates

- 1** FWE banquet cabinets are constructed for high performance in restaurant and resort banquet operations. Our stainless steel, tubular base frame comes standard and is engineered to absorb vibration and shock during transport
- 2** Our easy to read, simple to set controls are eye-level and recessed-protected to maximize durability. They include a full range F/C thermostat that continuously monitors cabinet temperature even without power
- 3** Heavy-duty "no sag" shelves are removable to facilitate thorough cleaning
- 4** FWE's patented Humi-Temp heat and humidity system eliminates hot and cold spots by gently circulating hot, moist air throughout the interior of the cabinet. Humidity can be added to condition circulated heat, keeping food fresh and hot for hours
- 5** Push/pull handles - allows easy maneuvering
- 6** Available for immediate shipment - FWE's popular P-120 is available to ship in 48-72 hours (Quick Ship terms and conditions apply) 
- 7** "P" series' models holds up to 11" plates.
"P-XL" models are available for up to 12.375" plates

**Two year limited warranty*



Tubular Welded Base Frame



Eye Level Control Panel



Heavy-Duty "No Sag" Shelves





Humidity Pan



SPECIFICATIONS

HEATED BANQUET TRANSPORT & SERVE CABINETS

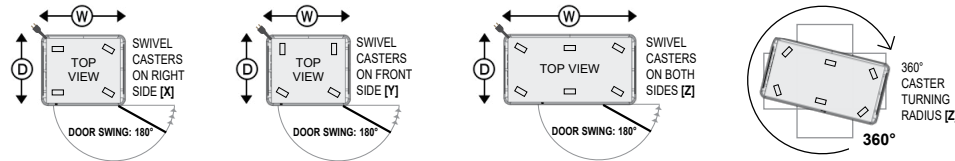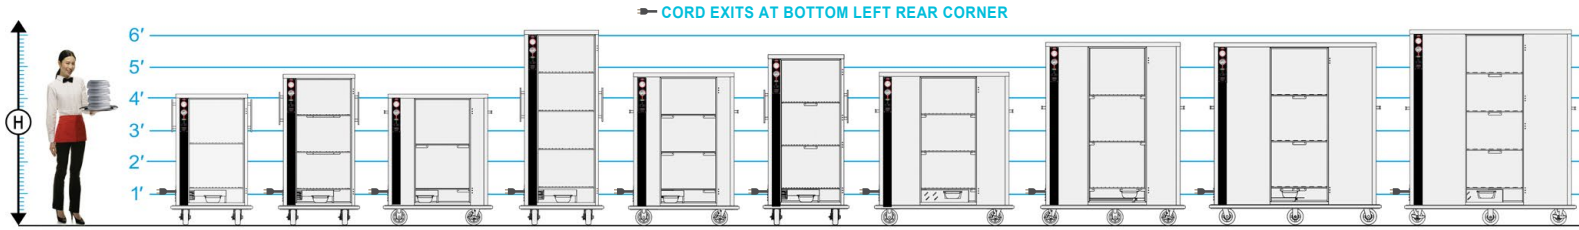

MODEL NUMBER	[A] COVERED PLATES: 11" DIAMETER				[B] SHELVES	SHELF SIZE	SHELF CLEARANCE (mm)	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CASTER SIZE	NO. OF DOORS	SHIP WT. LBS (KG)
	COVER & PLATE HEIGHT:							HIGH "H"	DEEP "D"	WIDE "W"			
	TOTAL PLATES	STACKS OF	TOTAL PLATES	STACKS OF									
	3 1/8"	2 5/8"											
40	5	48	6	2	22 1/4" x 21 3/4"	16 1/2" (419)	50.5" (1283)	28.5" (724)	31.75" (806)	6"	1	260 (118)	
48	4	60	5	3	22 1/4" x 21 3/4"	13 3/8" (348)	58.5" (1486)	28.5" (724)	31.75" (806)	6"	1	270 (123)	
60	5	72	6	2	22 1/4" x 33"	16 1/2" (419)	50.5" (1283)	28.5" (724)	42.5" (1080)	6"	1	290 (132)	
64	4	80	5	4	22 1/4" x 21 3/4"	13 3/8" (348)	72.75" (1848)	28.5" (724)	31.75" (806)	6"	1	310 (141)	
72	5	90	6	3	22 1/4" x 33"	13 3/8" (348)	58.5" (1486)	28.5" (724)	42.5" (1080)	6"	1	320 (146)	
90	5	108	6	3	22 1/4" x 33"	15 7/8" (403)	65" (1651)	38.75" (985)	33" (839)	6"	1	345 (157)	
96	4	120	5	3	22 1/4" x 44 3/8"	13 3/8" (348)	58.5" (1486)	28.5" (724)	53.75" (1365)	6"	1	400 (182)	
120	5	144	6	3	22 1/4" x 44 3/8"	16 1/2" (419)	67.75" (1721)	28.5" (724)	53.75" (1365)	6"	1	455 (207)	
150	5	180	6	3	22 1/4" x 54 3/4"	16 1/2" (419)	67.75" (1721)	28.5" (724)	64.25" (1632)	6"	1	495 (225)	
160	4	200	5	4	22 1/4" x 54 3/4"	13 3/8" (348)	72.75" (1848)	28.5" (724)	64.25" (1632)	6"	2 Dutch	560 (254)	

ELECTRICAL DATA			
MODEL NUMBER	P-48, P-60, P-72, P-80, P-90, P-108	P-120 P-144	P-180 P-200
VOLTS	120	120	120
WATTS	1315	1665	2065
AMPS	11	13.9	17.2
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA	5-15P	5-15P*	5-20P*
PLUG CANADA	5-15P	5-20P	5-30P
VOLTS	220-240	220-240	220-240
WATTS	1553	1969	2445
AMPS	6.5	8.2	10.2
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA	6-15P	6-15P	6-15P
PLUG CANADA	6-15P	6-15P	6-15P

* Dedicated circuit. Consult factory.

[A] Capacities when using covers depend on height of plate and cover. Capacities shown are based on 11" diameter plate and cover height of 3.125" and 2.625" respectively.

[B] Consult factory for clearance and capacity with extra shelves.

*P-108 model is a deep profile cabinet with a slim-line design and large depth.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners.

INSULATION. "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides, and door(s).

HANDLES. Heavy-duty, solid formed 1" x .375" thick; mounted at each end of unit. Mounting reinforced with stainless steel channel.

BUMPER. Solid continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgmounted die cast hinges. Doors shall have edgmounted and full grip door latches. The hinge and latch mountings are reinforced with stainless steel backing plates.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. P-144, P-180 and P-200 models shall be standard with a caster configuration of two (2) rigid and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

SHELVES. Triple plated, welded rod-type shelves shall be removable. Shelves shall be supported by high strength, "no sag" 14 gauge die-formed stainless steel brackets.

HEATING SYSTEM / CONTROLS. Patented built-in "Humi-Temp" system shall include an Incoloy nickel-chromium alloy heating element and Hi-Temp, self-lubricated, impedance protected fan-cooled blower motor. Cabinet shall have humidifying chamber and drawer style baffled humidifier pan. Both shall be stainless steel and removable. Controls shall be up-front, recessed and shall include a full range thermostat adjustable to actual temperature. Thermostat shall include temperature scale marked in ten degree increments (F/C) from 90° to 190°F (32° to 88°C). An operational range thermometer, power supply light, thermostat cycling light, and 20 amp ON/OFF switch are also included.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

- ELECTRICAL**
 Electric controls
 Upgraded element
 220 volt, 50/60 Hz single phase
 Solar digital thermometer
- DOORS**
 Key locking door latch
 Paddle latch
 Magnetic latch
 Padlocking transport latch
- CASTERS**
 All swivel (4 caster base only)
 Larger casters
 Floorlock (4 caster base only)
- EXTRAS**
 Plate carriers: CP or UP
 Cord winder bracket
 Menu card holder
 Dry erase board
 Extra shelves - factory installed
 Drop down tubular S/S handle
 Ergo U-shaped handle